

geoliner® 770



PRECISION WHEEL ALIGNMENT

 $\textbf{ENGINEERING UNLEASHED}^{\text{TM}}$





AUTO HEIGHT TRACKING

Automatic height tracking follows the vehicle as it is raised and lowered on the lift, eliminating the need for manual camera readjustment and reducing time spent at the console.



MOBILITY

The folding camera beams and low center of gravity provide convenient mobility between alignment bays.



MIDUN

Using simple, easy-to-follow red and green LED lights, our patented Vehicle Orientation Directional Indicator (VODI) leads technicians through the measuring procedure while the monitor is not in view, decreasing the time spent moving back and forth between vehicle and aligner.

PROFITS GROW AS SERVICE OPPORTUNITIES ARISE.

OPTIONAL SECONDARY SCREEN

Have access to all the readings from anywhere in the shop.

*Tablet not included

AUDIT MODE

Scan every vehicle with our unique Audit Mode function which performs a fast verification of the vehicle by measuring the front and rear toe, track width, camber, wheelbase, wheel diameter and cross dimensions. This will help identify any alignment problems so you can sell more services and keep your aligner operating at full-service to increase your shop's revenue.



OEM AFTERMARKET PROCEDURES


The geoliner® 770 advanced software offers instant access to real-time aftermarket OEM-recommended adjustments and repair information, as well as the correct clamps required for precise, OEM-specified wheel alignment service.





ADVANCED ADJUSTMENTS

- ✓ EZ-Toe
- ✓ A-Arm
- ✓ Cradle
- Single Tie Rod
- ✓ Drag Link
- ✓ Toe Curve
- ✓ Elevated
- ✓ Wheels Off
- ✓ Parts Calculator
- ✓ Parts & Tools

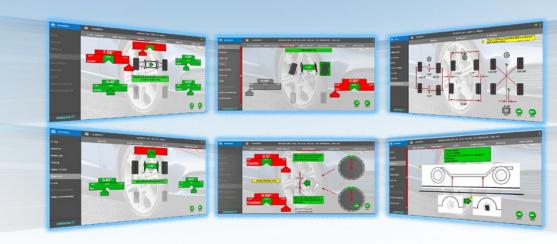

F7-TOF

Turn the front wheels and access difficult adjustment points while still displaying centered toe readings.


WHEELS OFF MODE

Allows easy access to hardto reach adjustments.

geoliner® 77[]

ADVANCED MEASUREMENTS

Measurements designed for advanced suspension troubleshooting and modified suspensions, including ride height, SAI, frame angle, max turn and toe out on turns.



XD CAMERA TECHNOLOGY

Cutting-edge high-definition video speed cameras continuously monitor the alignment process and instantly detect common environmental conditions or vehicle issues with the potential to cause misalignment.

SMART NOTIFICATION SYSTEM

Our smart notification system maximizes efficiency and accuracy by automatically identifying and fixing issues like suspension stress or environmental errors, which only requires a technician's intervention when more information is needed to take different corrective action.

CLOUD SERVICES

Save information to a secure cloud server and access reports remotely to send to customers via email or to print from anywhere in the shop.

AC400 CLAMPS



Using optimal force, the clamp attaches to the tire without contacting the rim, providing safe, speedy and uniform clamping operation.

AC200 CLAMPS



With a self-centering design, the two-sided claws guarantee solid, swift gripping, even over hub caps.

RIDE HEIGHT



Eliminate manual data entry, speed up measuring, and increase accuracy, using our specially designed, optional Ride Height Targets.

TECHNICAL SPECIFICATIONS

Track width	48-96" 122-244cm
Tire Diameter- AC400	19-39" 48-99cm
Wheel Diameter - AC200	11-22" 28-56cm
Power supply	100-230V 50/60Hz

STANDARD ACCESSORIES

Brake Pedal Depressor Two Wheel Chocks
Steering Wheel Holder



FIND A DISTRIBUTOR

https://hofmann-equipment.com/la-en/distributor

LATIN AMERICA +1 501 505 2794



