



geoliner[®] 660



PRECISION WHEEL ALIGNMENT

ENGINEERING UNLEASHED™

geoliner® 660

DESIGNED FOR THE INDEPENDENT WORKSHOP TO PROVIDE CORE ALIGNMENT FUNCTIONS QUICKLY AND EASILY.

By integrating cutting-edge wheel alignment technology with an intuitive software interface, the geoliner® 660 wheel aligner delivers premium technology at an affordable price. Auto repair businesses now have the ability to deliver revenue boosting alignment services to their customers using the geoliner® 660, without the need for extensive technician training or complicated equipment, while ensuring a positive customer experience. Our Quick Compensation feature enhances the alignment workflow by streamlining the process to increase productivity through the elimination of unnecessary steps.



AUTOMATIC HEIGHT TRACKING

Automatic height tracking follows the vehicle as it is raised and lowered on the lift, eliminating the need for manual readjustment of the camera and reducing time spent at the console.



XD CAMERA TECHNOLOGY

Cutting-edge high-definition video speed cameras continuously monitor the alignment process and instantly detect common environmental conditions or vehicle issues with the potential to cause misalignment.



RIDE HEIGHT

Eliminate manual data entry, speed up measuring, and increase accuracy, using our specially designed, optional Ride Height Targets.

QUICK COMPENSATION AND OPTIMIZED ALIGNMENT FLOW

Boost productivity by eliminating unnecessary steps. The alignment process is greatly enhanced by our quick measurement compensation and optimized alignment flow, which enables shops to grow their alignment business through increased productivity.

EASY

- Software designed in collaboration with technicians around the core of wheel alignment service
- Work with confidence using the Compensate, Warn & Alert system

FAST

- Video speed camera system
- Intelligent workflows
- Automatic tracking camera beam


FLEXIBLE

- Multiple beam configurations
- Cabinet position independent of camera beam
- Use mobility kit to combine cabinet & camera system into one mobile unit



VODI™

Using simple, easy-to-follow red and green LED lights, our patented Vehicle Orientation Directional Indicator (VODI™) leads technicians through the measuring procedure while the monitor is not in view, decreasing the time spent moving back and forth between vehicle and aligner.

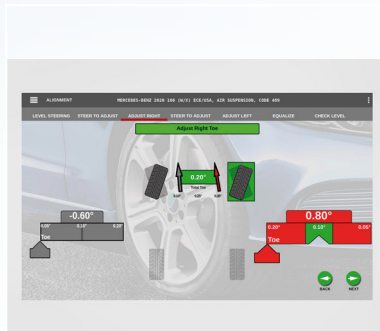

EZ-TOE

Our sophisticated software makes it simple to measure toe angle swiftly and with a high degree of accuracy, enabling technicians to tilt the wheel, even without a steering wheel holder, to access difficult points of adjustment.



CLOUD SERVICES

Save information to a secure cloud server and access reports remotely to send to customers via email or print from anywhere in the shop.

NOTIFICATION SYSTEM

Our smart notification system maximizes efficiency and accuracy by automatically identifying and fixing issues like suspension stress or environmental errors, and only requires technician intervention when more information is needed to take different corrective action.



COMPENSATE:

Measurement ok and compensated with no notification



WARN:

Wheel imperfections are compensated and user is warned



ALERT:

Critical errors are detected and corrective actions are displayed



AC200 CLAMPS



With a self-centering design, the two-sided claws guarantee solid, swift gripping, even over hub caps.

MOBILITY CART (OPTIONAL)



Relocate the equipment freely around the shop (EAK0320J78D)

TECHNICAL SPECIFICATIONS

Power supply	100-230V 50/60Hz
Track Width	12"-24" 30-61cm
Wheelbase	79"-180" 201-457cm

STANDARD ACCESSORIES

Two Wheel Chocks	Brake Pedal Depressor
Steering Wheel Holder	

FIND A DISTRIBUTOR

UNITED KINGDOM
+44 1553 692422

