

# HEAVY-DUTY SERIES



**HEAVY-DUTY TIRE CHANGERS**

## HEAVY-DUTY TIRE CHANGERS

**HIGH PRODUCTIVITY  
EASY TO USE  
LESS TECHNICIAN FATIGUE**


**monty® 5800B**

The monty® heavy-duty tire changers from Hofmann® are professional-grade tire changing machines designed for heavy machinery, including off-road vehicles, skidders, commercial trucks, and tractors. These machines include a powerful hydraulic cylinder that drives both the mounting tool and bead breaker, ensuring efficient and precise tire changing operations.

They feature a self-centering, four-jaw, two-speed mechanism that provides the capability to position the wheel and mounting tool accurately across a broad adjustment range. For challenging tire changing applications requiring absolute precision and reliable results, the monty® heavy-duty series stands ready to do the job.



**UP TO 58" RIM CLAMPING**

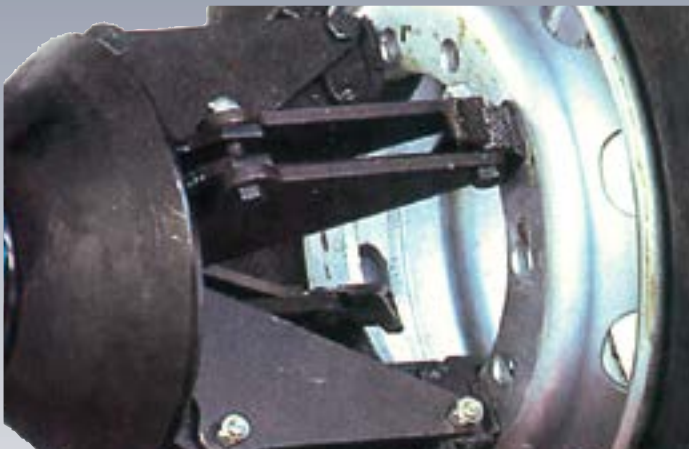

### CHUCK

Two chuck speeds of 4 or 8 rpm to be preset by switch. Slow speed allows thorough monitoring of critical operations, whereas quick speed allows quick mounting/demounting in less critical phases.



### BEAD BREAKER

The bead breaker disk is equipped with a special tilting system in order to increase bead breaking effort and to make sure the disk is always in optimum position relative to the rim.



## HEAVY-DUTY TIRE CHANGERS

THE ULTIMATE IN PRODUCTIVITY AND PERFORMANCE FOR HEAVY-DUTY

monty® 4400



UP TO 44" RIM CLAMPING

\* can be extended up to 56"

monty® 4250



UP TO 32" RIM CLAMPING

monty® 3850



UP TO 26" RIM CLAMPING



### EXTREMELY WIDE CLAMPING RANGE

With an expansive clamping range of 14 to 58 inches without extensions, the elongated jaws can easily accommodate rims with substantial offset. Ideal for tire shops mounting and demounting tires of commercial trucks and trailers up to heavy-duty agricultural and earthmoving vehicles.



### ADJUSTABLE MOUNTING TOOL

Equipped with a bead breaker disk and lever tool, the versatile mount/demount tool features a 180° rotational capacity, enabling seamless operations on both sides of the tire.

# HEAVY-DUTY TIRE CHANGERS



## SPECIAL DESIGN

Adjustable studs ensure long life of the chuck arm hinge.



## MOBILE CONTROL UNIT

A single technician can oversee all tire changing operations safely and from a distance while utilizing the wired remote control console, efficiently boosting productivity in the process.



## MOUNTING TOOL

Semi-automatic (monty® 5800 and monty® 4400)  
Manual (monty® 3850)



## CONTROL CONSOLE

Lightweight, ergonomic and easy to operate.

## TECHNICAL SPECIFICATIONS

	5800	4400	4250	3850
Rim Clamping Range	14"-58"   36-147cm	14"-44"   36-111.7cm	14"-32"   36-81.2cm	14"-26"   36-66cm
Max Tire Width	59"   150cm	43"   110cm	43"   110cm	28"   70cm
Max Wheel Diameter	99"   250cm	90"   230cm	92"   235cm	59"   150cm
Max Wheel Weight	4400 lbs.   2000 kg	3300 lbs.   1500 kg	3300 lbs.   1500 kg	3300 lbs.   1500 kg
Power Supply	230V 3Ph 60Hz	400V 3ph 50Hz	400V 3ph 50Hz	208V 1Ph 60Hz
Dimensions HxWxD	79"x 167"x 83" 201x424x211cm	63"x117"x 81" 160x297x206cm	58"x83"x83" 148x210x210cm	48"x 64"x 87" 122x163x221cm



### FIND A DISTRIBUTOR

<https://hofmann-equipment.com/la-en/distributor>



Snap-on® Total Shop Solutions offers a wide range of garage equipment solutions for workshops, garages, car dealers and tire shops, thanks to the specific solutions provided by its portfolio of premium brands. Hofmann® is a brand of TSS and is committed to product innovation and improvement. Therefore, specifications listed in this sell sheet may change without notice. ©2024 Snap-on Incorporated. Hofmann® is a trademark, registered in the United States and other countries, of Snap-on Incorporated. All rights reserved. All other marks are marks of their respective holders. sswht3025 (LA en) 3/2024

LATIN AMERICA  
+1 501 505 2794

**HOFMANN**  
HOFMANN-EQUIPMENT.COM