

monty® 8800



ALL-IN-ONE TYRE CHANGER

ENGINEERING UNLEASHED™

monty® 8800

HIGH PRODUCTIVITY EASY TO USE LESS TECHNICIAN FATIGUE

A high-capacity centre-post tyre changer, the monty® 8800 from Hofmann® seamlessly integrates the high-productivity features of a tabletop model with the exceptional performance of a leverless tyre changer. This sophisticated equipment includes an on-floor bead breaker, top-side bead seater, wheel lift, and camera for precise control over lower bead operations. Specialising in low-profile, ultra-high-performance (UHP), and run-flat tyres (RFT), the monty® 8800 demonstrates remarkable versatility with high-aspect ratio tyres. The integrated wheel lift saves time by effectively mitigating wheel damage risk, technician fatigue, and potential injuries, while smartSpeed™ technology delivers an optimal motor torque/speed combination. The innovative mount/demount system, optimised bead breaker design, and pneumatic bead depressor significantly enhance productivity levels, and further boost efficiency.



QUICKLOK™

With the capability of secure wheel clamping across a diverse range of wheel types, this powerful electromechanical device eliminates the need for additional wheel safeguarding measures.

For version 8800s and 8000b



WIRELESS COMMAND

The centre-post clamping system can be operated by wireless command in the shaft handle.

For version 8800p and 8000g

monty[®] 8800

**THE ULTIMATE IN PRODUCTIVITY
AND PERFORMANCE**

POWERMONT™

This leverless mounting and demounting tool is designed to coordinate seamlessly with the dynamic bead breaker, ensuring optimal positioning. Engineered with upgraded steel and fortified plastic protection, its durability is unparalleled, even over the long term. This innovative system is ideally suited for a diverse range of tyre types.



OPTIMUM BEAD BREAKER SYSTEM

This dual-component system integrates an array of bead-breaking tools for a seamlessly optimised solution that includes the Dynamic Bead Breaker, calibrated to handle a variety of tyres, and the On-Floor Bead Breaker, which can handle both standard and high-aspect ratio tyres. Only for 8800p, 8800g and 8800s



SMARTSPEED™

This revolutionary, patent-protected technology optimises the applied torque on the wheel and automatically establishes the maximum rotational speed of the wheel.



DYNAMIC BEAD BREAKER

The precisely calibrated synchronised dual-disk system thoroughly aligns both upper and lower tyre beads, ensuring unparalleled precision and reducing the potential for wheel damage. Adjustable tilt feature included for tyres with a stiff sidewall.




CONTROL PANEL

The user-friendly control panel employs a colour-coded layout and tool-matching controls to ensure easy navigation.



PNEUMATIC BEAD PUSHER

The Pneumatic Bead Pusher is designed with a reverse-side hook to assist in lifting heavy tyres, efficiently facilitating the mounting process of the upper bead.

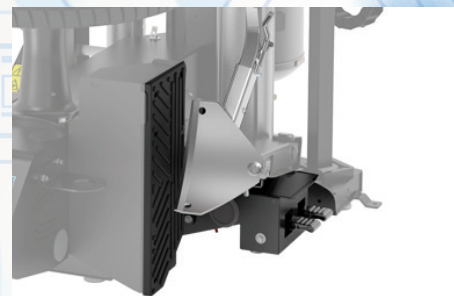

ON-FLOOR BEAD BREAKER

Side-shovel bead breaker, featuring an ergonomically positioned pedal control is the quickest solution for efficiently handling a range of tyres.



PNEUMATIC WHEEL LIFT

Pedal-operated wheel lift facilitates the lifting of heavy wheels, effectively minimising technician fatigue and increasing overall productivity. Optional for 8800g, 8800s and 8800b



TOP-SIDE BEAD SEATER

This ergonomic precision tool quickly injects compressed air into a tyre, ensuring the bead seals tightly onto the rim.



LOWER BEAD CAMERA VIEW

The lower bead camera offers a clear visual feed on the control panel monitor, ensuring accuracy while maximising the efficiency of the lower bead breaking process. Only for 8800p

TECHNICAL SPECIFICATIONS

Max Rim Diameter	30" 76cm
Max Tyre Width	15" 38cm
Max Rim Width	13" 33cm
Max Wheel Diameter	47" 119cm
Wheel Lift Capability	154 lbs. 70kg
Power Supply	230V 1ph 50-60Hz
Air Pressure Required	116-174 PSI 8-12 bar
Dimensions HxWxD	74"x58"x73" 188x148x186cm

STANDARD ACCESSORIES

PBD330 Pneumatic bead assist device, Bead extraction tool, Clip-on plastic tyre protector, Bead clamp, Smart Bead Spacer, Bead breaker blade protector and 20/50/70mm spacers

Quick-inflating valve for quick and safe inflation of tyres in line with CE standards, Pedal-operated inflation system, Brush for tyre lubricant and holder for tyre lubricant container

FIND A DISTRIBUTOR

AUSTRALIA
+1 800 810 581

NEW ZEALAND
+0800 762 766



HOFMANN-EQUIPMENT.COM

HOFMANN®

Snap-on® Total Shop Solutions offers a wide range of garage equipment solutions for workshops, garages, car dealers and tyre shops, thanks to the specific solutions provided by its portfolio of premium brands. Hofmann® is a brand of TSS and is committed to product innovation and improvement. Therefore, specifications listed in this sell sheet may change without notice. ©2026 Snap-on Incorporated. Hofmann® is a trademark, registered in the United States and other countries, of Snap-on Incorporated. All rights reserved. All other marks are marks of their respective holders. ssw23077 (AU en) 09/2026